

# MARION COUNTY SURVEYOR'S OFFICE


## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 17 TWN. 17<sub>N</sub> RNG. 5<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 10-07-09  
Party Chief: Wilcoxen  
Crew: Finney  
Type of Marker: Harrison  
Method of Establishment: County: 4-29-1997  
IN S.P.C. E Zone, NAD 83  
Name: 17051704  
N: 518 660.864 4(m)  
E: 71 925.437 4(m)

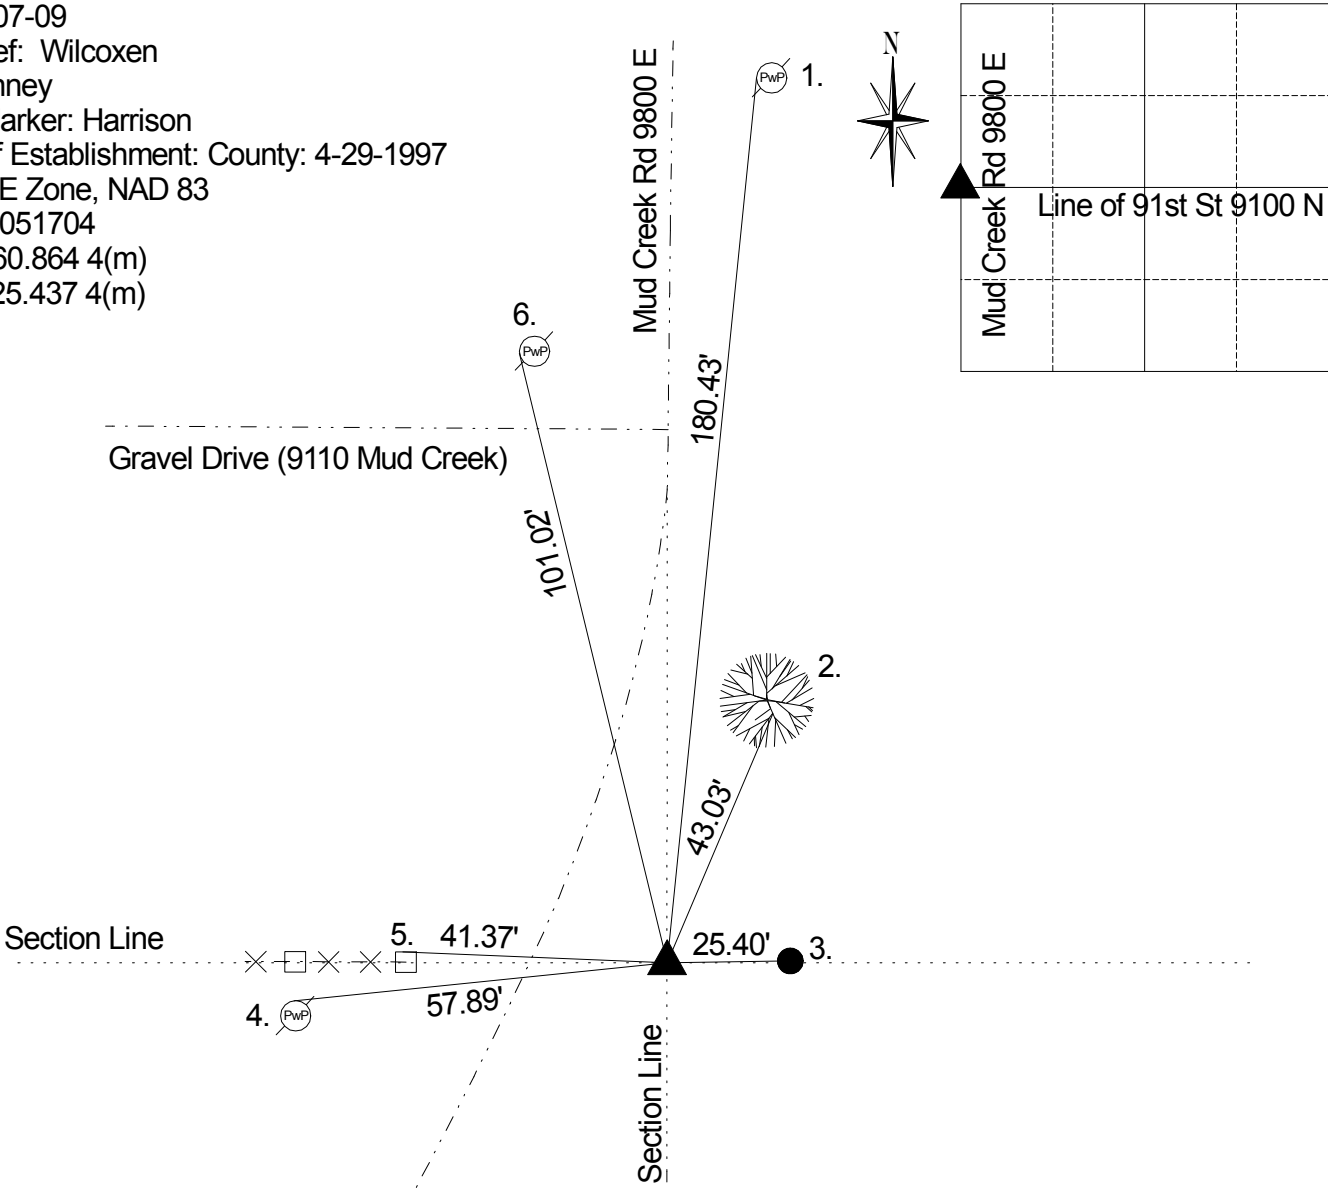

Original post set by W. B. Laughlin in 1821 with witnesses: 14" beech N 69 W 28 links; 12" beech S 44 E 20 links per Marion County Atlas p. 16. Legal survey by Wilson 8/1854 called corner 'E' monumented with stone per Lawrence Township Legal Survey Book p. 8. Legal survey by Voorhis June of 1869 indicates the corner and calls it "old" per Lawrence Legal Book p. 34. Ties from P.I.Cripe on 5/1/1975 called a 5/8 rebar fd at corner, and their plat (Masthead Job # 75005-10100) indicates an "iron pin found in old corner fence post". Ties from the MCSO dated 5/21/75 and 8/7/79 are to the iron pin previously referred to. 5/26/82 Green excavated 4'x4'x4' area and found the "old corner fence post" was actually an old tree, and the pin had been set in the stump, and the area backfilled 2' to 2½', making dating placement of pin / death of tree difficult. The area was probed for a stone with no success, and the stump cut down to allow for Harrison placement. A #305 Harrison was set in the position of the iron pin. Retied 4/29/1997 by Kiste. Retied 5/3/2002 by Wilcoxen. Retied 10/7/09 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	180.43'	PK nail W PwP #1-181 BB 18" up
2.	43.03'	Mag nail w/brass washer S twin hackberry spur root
3.	25.40'	Rebar
4.	57.89'	PK nail N PwP #110-221 BA 15" up
5.	41.37'	PK nail N fence post 18" up
6.	101.02'	Mag nail w/brass washer W PwP #35-181 BB 12" up